

KOMATSU

EX50 SERIES

Model: FD150E-8

KOMATSU FORKLIFT

000 / 0707




EX50 SERIES

● STANDARD SPECIFICATIONS

	1.2	Model	Manufacturer's Designation		FD150E-8
	1.3	Power Type	Electric, Diesel, Gasoline, LPG, Cable		Diesel
	1.4	Operation Type			Sitting
	1.5	Rated Capacity	Q	kg(lb)	15000(33,000)
	1.6	Load Center	c	mm(in)	600(24)
	1.8	Load Distance	x	Front Axle Center to Fork Face	mm(in) 750(29.5)
	1.9	Wheelbase	y	mm(in)	3100(122.0)
	2.1	Service Weight		kg(lb)	16570(36,530)
Weight	2.2	Axe Loading	Loaded	Front	kg(lb) 28740(63,360)
	2.2.1			Rear	kg(lb) 2830(6,240)
	2.3		Unloaded	Front	kg(lb) 7210(15,900)
	2.3.1			Rear	kg(lb) 9360(20,640)
Tyre	3.1	Tyre Type			Pneumatic
	3.2	Tyre Size	Front		11.00-20-16PR(I)
	3.3		Rear		11.00-20-16PR(I)
	3.5	Number of Wheels	Front/Rear(x=driven)		4x2
	3.6	Tread, Front	b10	mm(in)	1770(69.7)
	3.7	Tread, Rear	b11	mm(in)	1890(74.4)
	4.1	Tilting Angle	α/β	Forward/Backward degree	6/12
Dimensions	4.2	Mast Height, Lowered	h1	2-stage Std. Mast mm(in)	3270(128.7)
	4.3	Std. Free Lift	h2	2-stage Std. Mast from Ground mm(in)	0(0.0)
	4.4	Std. Lift Height	h3	2-stage Std. Mast from Ground mm(in)	3000(118)
	4.5	Mast Height, Extended	h4	2-stage Std. Mast mm(in)	4780(188.2)
	4.7	Height, Overhead Guard	h5	mm(in)	2810(110.6)
	4.19	Length, with Std. Forks	L1	mm(in)	5920(233.1)
	4.20	Length, to Fork Face	L2	mm(in)	4700(185.0)
	4.21	Width, at Tyre	b1	Single mm(in)	2410(94.9)
	4.22	Forks	s/e/l	Thickness/Width/Length mm(in)	85x190x1220(3.3x7.5x48.0)
	4.23	Fork Carriage Class			Pin Mount
Performance	4.24	Width, Fork Carriage	b2	mm(in)	2210(87.0)
	4.31	Ground Clearance	m1 Under Mast	mm(in)	250(9.8)
	4.32		m2 at Center of Wheelbase	mm(in)	350(13.8)
	4.33	Right Angle Stacking Aisle	Ast	Add load length and clearance mm(in)	5150(202.8)
	4.35	Turning Radius	Wa	mm(in)	4400(173.2)
	5.1	Travel Speed (FWD)	Loaded, 1st/2nd/3rd	km/h(mph)	9/19.5/27.5(5.6/12.1/17.1)
	5.1.1		Unloaded, 1st/2nd/3rd	km/h(mph)	9.5/21/32(5.9/13.0/20.2)
	5.2	Lifting Speed	Loaded/Unloaded	mm/s(fpm)	325/350(64/69)
	5.3	Lowering Speed	Loaded/Unloaded	mm/s(fpm)	400/400(79/79)
	5.6	Max. Drawbar Pull	Loaded, 1.5km/h, 3min rating	kN(lb)	80(18,160)
Others	5.8	Max. Gradeability	Loaded, 1.5km/h, 3min rating	%	25
	5.10	Service Brake	Operation/Control		Foot/Hydraulic, Powered
	5.11	Parking Brake	Operation/Control		Hand/Mechanical
	5.12	Steering	Type		Hydraulic Power Steering
	6.4	Battery	Voltage/Capacity at 5-hour rating	V/Ah	24/80
I.C. Engine	7.1	Make / Model			KOMATSU SAA6D107E-1
	7.2	Rated Output, SAE net		KW(HP)	122(164)
	7.3	Rated RPM		min ⁻¹	2200
	7.3.1	Max. Torque, SAE net		Nm@min ⁻¹	575(424)@1600
	7.4	No. of Cylinders/Displacement		cm ³ (cu.in)	6/6690(408)
	7.6	Fuel Tank Capacity		Ltr(US Gal)	280(74.0)
	8.2	Relief Pressure for Attachment		bar(psi)	216(3,100)
	8.2.1	Hydraulic Tank Capacity		Ltr(US Gal)	210(55)
	8.6	Clutch			Torque Converter
	8.7	Transmission			TORQFLOW

EX50 SERIES

FD150E-8 ● CAPACITY CHART

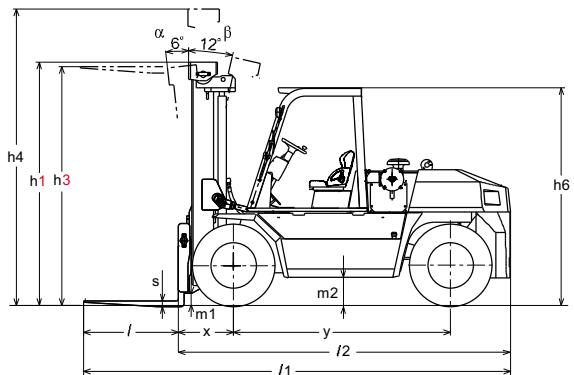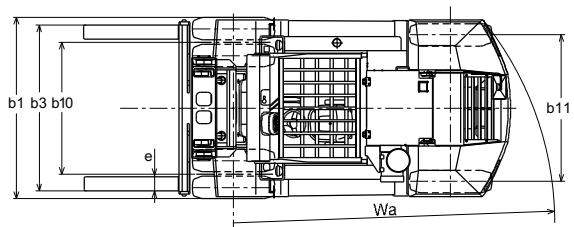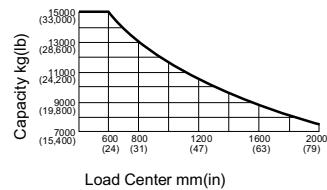

● STANDARD EQUIPMENT

- Headlights
- Rear view mirror
- Turn signal lamps
- Charge warning lamps
- Safety checker
- Hourmeter
- Fuel gauge
- Torque converter oil temperature gauge
- Water temperature gauge
- Neutral safety switch
- Brake oil pressure warning buzzer
- Torque converter oil cooler
- Tilttable steering column
- Hydraulic power brake
- Horn
- Overhead guard
- Drawbar pin
- Cyclonic air cleaner
- Notch-release parking brake
- Back-up buzzer

● OPTIONAL EQUIPMENT

- Automatic Transmission
- Wet disk brake
- Operator Presence Sensing (OPS) system
- UL specification
- Cold climate specification (-30 degree)
- Rotating light
- Rear working light
- Speedometer
- Load indicator
- Special length forks
- Extension forks
- Air cleaner with pre-cleaner
- Spark arrester
- Rear under mirror
- Steel cabin
- Air conditioner
- Heater
- Rotating seat
- Fuel cap with key

● ATTACHMENT

- Side shifter
- Side shift fork positioner (Independent move)
- Fork positioner (Independent move)
- Fork positioner with side shift function (Simultaneous move)
- Manipulator*
- Ram*
- Crane*
- Pole carrier fork*
- Furnace charger*
- Tyre handler*

*: Available upon request

EX50 SERIES

● MAST SELECTION

2-stage Free View Mast

* mark is the standard mast

Max. Fork Height	Overall Height		Free Lift	Tilting Angle		Capacity at 600mm(24") Load Center FD150E-8 Front Double Tyre	Mast Weight	
	Lowered	Extended		Forward	Backward			
mm(in)	mm(in)	mm(in)	mm(in)	degree	degree	kg(lb)	kg(lb)	
2800(110)	3170(124.8)	4580(180.3)	0(0)	6	12	15000(33,000)	-50(-110)	
3000(118)*	3270(128.7)	4780(188.2)	0(0)	6	12	15000(33,000)	3150(6,940)	
3300(130)	3420(134.6)	5080(200.0)	0(0)	6	12	15000(33,000)	+70(+155)	
3500(138)	3520(138.6)	5280(207.9)	0(0)	6	12	15000(33,000)	+110(+240)	
3700(146)	3620(142.5)	5480(215.7)	0(0)	6	12	15000(33,000)	+160(+350)	
4000(157)	3770(148.4)	5780(227.6)	0(0)	6	12	15000(33,000)	+290(+640)	
4500(177)	4020(158.3)	6280(247.2)	0(0)	6	12	15000(33,000)	+400(+880)	
5000(197)	4470(176.0)	6980(274.8)	0(0)	6	12	15000(33,000)	+640(+1,410)	
5500(217)	4720(185.8)	7480(294.5)	0(0)	6	12	13500(30,000)	+760(+1,675)	
6000(236)	4970(195.7)	7980(314.2)	0(0)	6	12	12000(26,500)	+870(+1,920)	